

# SPT1000

SUPERIOR FUEL CONTROL COMBINED  
WITH CREDIT AND DEBIT CARD PROCESSING

computrol

## MULTI-CARD PAYMENT FUNCTIONALITY

FOR ATTENDED AND UNATTENDED FUELING FACILITIES

Including airports, marinas, card locks and service stations



**EMV**  
Ready

GROW YOUR BUSINESS • IMPROVE YOUR CASH FLOW




Chip and PIN

SECURITY ACCOUNTABILITY RELIABILITY

computrolfuel.com

# SPT1000 Fuel Management System

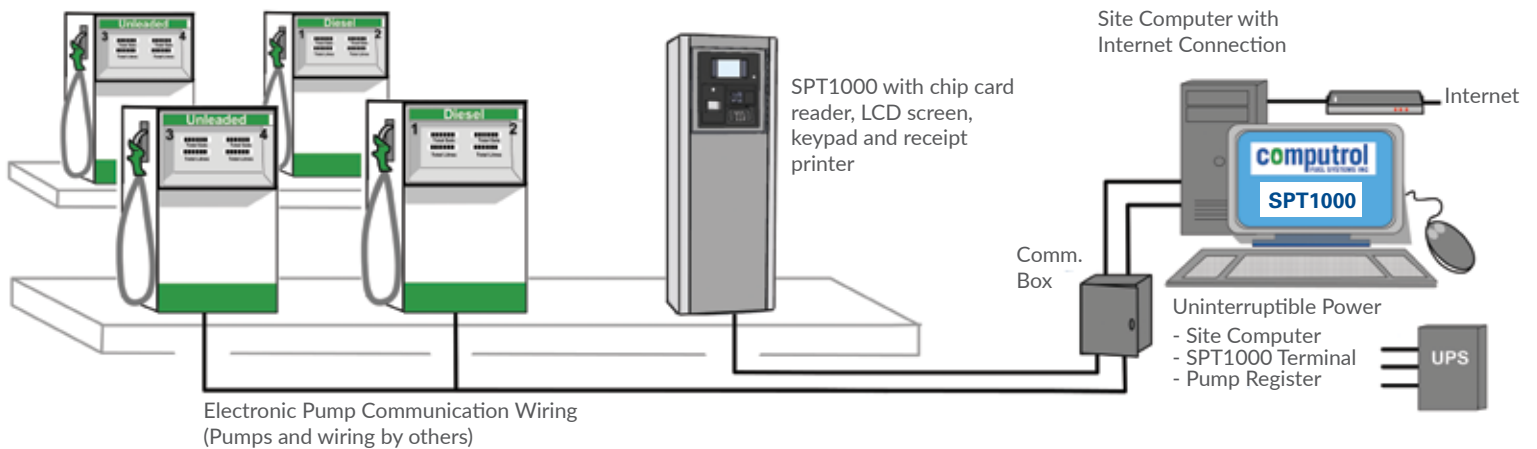

The SPT1000 Fuel Management System provides a complete solution for the operation and management of attended and/or unattended fueling facilities. It allows the operator to control, monitor, and manage all aspects of a fuel dispensing facility via secure internet connection from anywhere in the world.

## FEATURES

- Ready to process Chip & PIN (EMV) transactions
- SPT1000 accepts credit cards, debit cards, fleet cards and proprietary cards
- Multi-lingual instructions
- PCI PA-DSS compliant
- Provides customer with fueling safety instructions
- Sends alarm and warning messages via email automatically
- Works with all major pumps Gilbarco, Kraus and Wayne...
- Operates in extreme weather conditions
- Supports up to 16 fueling positions
- Supports multi-terminal configurations for larger facilities
- Ability to change fuel price remotely from a central or management office
- Ability to turn pump OFF and ON remotely
- Receipt re-print
- Provides a range of activity and financial reports
- Fuel tank/ inventory management
- Ability to apply fuel restriction
- Various discount levels
- Automatic/scheduled fuel price change and promotions
- A regulated power supply to convert AC power to clean Direct Current for the electronics
- A thermostatically controlled heater is incorporated to ensure proper operation in cold temperatures

- CSA approved
- LED lighting

## INCLUDED COMPONENTS

- PC with communication box, Kraus pump control interface and UPS
- SPT1000 terminal includes a large LCD Graphic screen, tamper-proof stainless steel keypad, chip/magnetic-stripe card reader and thermal receipt printer

## SPECIFICATIONS

- Dimensions: H 59" W 20" D 14"
- Weight: 28 kg (34lb)
- Electrical: 120 VAC, 60 Hz, 5 Amps
- Operating Temperature: -40C (-40F) to 45C (110F)



Tel: 604.421.1001      Web: [computrolfuel.com](http://computrolfuel.com)  
TF: 1.877.421.1001      Email: [sales@computrolfuel.com](mailto:sales@computrolfuel.com)  
Fax: 604.421.1007

